



# Portugal Gove St. Philip's

## TRAFFIC CALMING POLICY

Town of Portugal Cove-St. Philip's

January 2017

Final Report




Harbourside Transportation Consultants  
#16357

**PROJECT NAME:** TOWN OF PORTUGAL COVE-ST. PHILIP'S – TRAFFIC CALMING POLICY

**PROJECT NUMBER:** 16357

<b>Client:</b>	Town of Portugal Cove-St. Philip's
<b>Status:</b>	Final Report – Issued to Client – January 31, 2017 Draft Report – Issued for Client Review – November 22, 2016

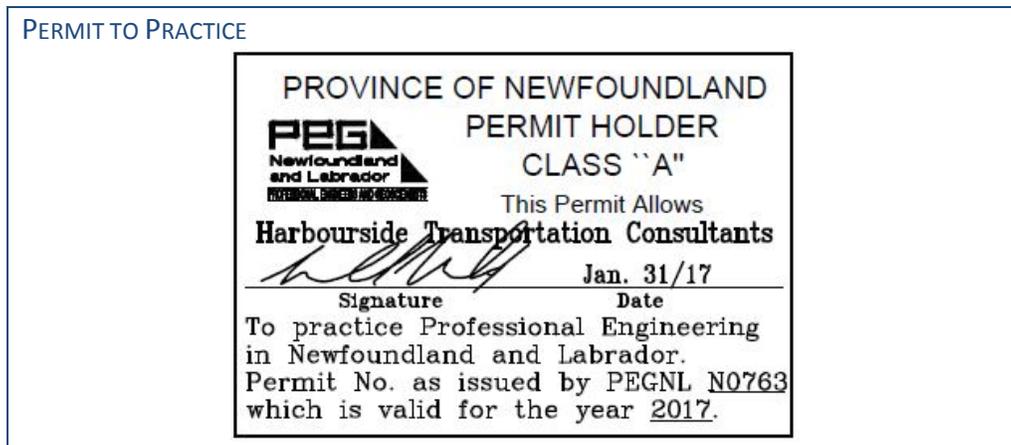

	PREPARED BY:	REVIEWED BY:	APPROVED BY:
<b>Name:</b>	C. McCarthy	M. MacDonald	R. King
<b>Initial:</b>			
<b>Date:</b>	January 26, 2017	January 31, 2017	January 31, 2017

## TABLE OF CONTENTS

<b>1</b>	<b>INTRODUCTION .....</b>	<b>1</b>
1.1	What is Traffic Calming?.....	1
1.2	Traffic Calming Terms and Basic Acronyms .....	1
<b>2</b>	<b>TRAFFIC CALMING METHODOLOGY.....</b>	<b>2</b>
2.1	Step 1 – Initial Request for Traffic Calming.....	3
2.2	Step 2 – Initial Screening Process.....	3
2.2.1	Collection of Data .....	5
2.3	Step 3 – Ranking Requests .....	6
2.4.1	Collection of Data .....	8
2.5	Step 4 – Prioritized Candidate List produced for Council approval and Funding Allocation	9
2.6	Step 5 – Initial Residential Support .....	9
2.7	Step 6 – Plan Development .....	10
2.7.1	Traffic Calming Measures .....	10
2.8	Step 7 – Resident Support.....	16
2.9	Step 8 – Final Council Approval.....	16
2.10	Step 9 – Design, Tendering & Construction .....	16
2.11	Step 10 – Follow-Up .....	18
<b>3</b>	<b>OTHER RELATED ITEMS.....</b>	<b>18</b>
3.1	Measuring Speeds and Traffic Volumes for Data Collection.....	18
3.2	Emergency Vehicle Routes.....	19
3.3	Design of New Subdivisions with Traffic Calming Measures.....	19
3.4	Sources of Information & References .....	19

## LIST OF FIGURES

Figure 1 – Initial Screening Flow Chart for Traffic Calming Requests .....	5
--	---

## LIST OF TABLES

Table 1 – Initial Screening Criteria for Traffic Calming Requests.....	4
Table 2 – Ranking Criteria and Points Allocations for Local Roadways .....	7
Table 3 – Ranking Criteria and Points Allocation for Collector Roadways.....	7
Table 4 – Summary Table of Traffic Calming Measures.....	17

## APPENDICES

Appendix A – Traffic Calming Request Form

## 1 Introduction

Residential roadways are meant to be shared by pedestrians, cyclists and motorists alike. On local and collector roadways, users should be able to co-exist in harmony and do so in a safe manner. In neighbourhoods with this dynamic, the roadways feel safe and are a pleasure to walk, cycle and drive on. These are the roadways and neighbourhoods that we want to create for all residents to enjoy.

Unfortunately, and for a myriad of reasons, many of the local roadways in different neighbourhoods experience problems, both real and perceived, that may be related to traffic volumes, speeds, geometry and general operations. These issues result in local roadway that are not perceived as being pleasant or safe for children, pedestrians, cyclists or motorists alike.

Where such situations exist, residents, and often others in the community, demand actions from the governing authority, which most often is the community's Council and/or Staff, to have the traffic and/or safety issues resolved.

Municipalities often recognize the benefits in addressing traffic and pedestrian safety issues in a consistent manner. Many communities, for example, will have warrant systems that they employ for traffic signals and for the installation of pedestrian crossings to ensure these controls are only put in place when needed and in a safe consistent manner. Dealing with speeding and traffic issues in neighbourhoods is no different. Many organizations throughout Canada and North America are putting "Traffic Calming" policies in place to deal with neighbourhood traffic and speeding concerns in a consistent/ appropriate manner.

### 1.1 What is Traffic Calming?

Traffic calming is most often defined as a combination of physical and/or policy measures that, when implemented, reduce the negative effects of the use of motor vehicles on residential roadways, alter motorists' behaviour and improve conditions for both pedestrians and cyclists.

### 1.2 Traffic Calming Terms and Basic Acronyms

The following is a list of the meanings of many common traffic calming terms and acronyms that are used throughout this report:

- **Roadway Classifications** – Roadways within a municipality are often classified to describe their role and functionality in the road network system. There are three road classifications used by the Town of Portugal Cove-St. Philip's. These included Arterial Roadways, Collector Roadways and Local Roadways.
- **Local Roadways** – The primary function of a local roadway is to provide access to adjacent properties. Local roadways are not intended for use as through traffic routes.
- **Collector Roadways** – Roadways classified as collector roadways are designed and intended to provide access to adjacent properties that are balanced by the need to collect and distribute traffic travelling to and from a neighbourhood. As with local roadways, collector roadways are not generally intended to be through routes or to carry significant volumes of traffic within the overall road network.
- **Arterial Roadways** – The primary function of an arterial roadway is to move traffic within the road network system. Typically, such roadways are not eligible for the traffic calming process.
- **ADT** – Average daily traffic recorded on a roadway over a 24 hour period.

- **AADT** – Average annual daily traffic on a roadway over a 24 hour period based data collected over a year.
- **VPD** – Vehicles per day.
- **85<sup>th</sup> Percentile Speed** – The speed separating the fastest 15% of vehicles from the slowest 85%. This speed is typically used by traffic professionals for a variety of reasons including to gauge the magnitude of a speeding problem.
- **Pedestrian Facilities** – Typically include sidewalks and off-road trails.
- **Pedestrian Generators** – Facilities that typically attract pedestrians. Examples include parks, schools, and community centres.
- **Vulnerable Road Users** – Vulnerable road users can be defined as any non-motorist that use the roadway, such as pedestrians, cyclists and visually/mobility impaired pedestrians.
- **Through Traffic** – Traffic that neither originates from nor is destined to a specific neighbourhood. This would include traffic that uses a neighbourhood roadway for convenience only.
- **TAC** – Transportation Association of Canada.

## 2 Traffic Calming Methodology

Harbourside Transportation Consultants (HTC) is suggesting the following methodology to manage traffic calming issues throughout the Town of Portugal Cove-St. Philip's. The process has been organized into 10 basic steps, which are as follows:

- Step 1 – Initial request for traffic calming
- Step 2 – Initial screening process
- Step 3 – Ranking requests, once the request passes Step 2
- Step 4 – Prioritized candidate list produced for council approval and funding allocation
- Step 5 – Initial residential support – survey – 60% support – champion mail listing
- Step 6 – Plan development
  - Initial concepts by staff/consultant
  - Tool box of available options
  - Focus group presentation
  - Focus group input – plan development
- Step 7 – Resident support
  - Staff to finalize concept plans and descriptions
  - Distribute to neighbourhood
  - 60% support
- Step 8 – Final council approval
  - Staff to revise estimated costs
  - Provide council with final concept plans
- Step 9 – Design, tendering and construction
  - Preliminary design
  - Detailed design
  - Tendering
  - Construction
- Step 10 – Staff follow up
  - Staff to verify that the traffic calming measures effectively addressed the issues that prompted the original request.

## 2.1 Step 1 – Initial Request for Traffic Calming

The traffic calming process is most often initiated by a resident or group of residents representing a neighbourhood and the concerns are most often related to the speed of and/or the traffic volumes on a particular roadway(s) in a neighbourhood.

To begin the traffic calming process, the resident(s) concern must be made in writing using the Town's "Traffic Calming Request Form" and sent to the appropriate Town staff for follow up. The "Traffic Calming Request Form" should be made available on the Town's webpage, or in hard copy at the appropriate Town facility. An example can be found in Appendix A.

## 2.2 Step 2 – Initial Screening Process

The initial screening process that will be undertaken by the Town of Portugal Cove-St. Philips staff will consider the classification of the roadway(s) under consideration, grade, collision history, average daily traffic volume and the defined threshold limits in the 85<sup>th</sup> percentile speed. The specific considerations include:

- **Grade** – If the grade of the roadway being considered exceeds 8%, then traffic calming measures should not be considered. This approach would be consistent with many other jurisdictions and stems back to the fact that implementing traffic calming measures on roadways with steep grades could result in safety related issues, especially under inclement weather conditions.
- **Collision History** – The collision history of the roadway within the past 3 years, specifically involving vulnerable road users such as cyclists and pedestrians, which could have potentially been avoided with the implementation of traffic calming measures. This would be cause to advance the roadway through the initial screening process regardless of the volume and speed criteria. For local roadways, this threshold should be set at 3 collisions over a 3 year timeframe. For collectors, this threshold should be set at 6 collisions over a 3 year timeframe.
- **Volumes on Local Roadways** – The thresholds used in other jurisdictions for the minimum volumes upon which traffic calming could be considered for local roadways can vary, but typically falls between 500 and 900 vpd. The Institute of Transportation Engineers (ITE) Trip Generation Manual states that a typical local residential household generates an average of 10 two-way trips per day. HTC is recommending that the initial threshold be set at 600 vpd for roadways classified as local roadways. This threshold can always be adjusted once the Town of Portugal Cove-St. Philip's determines a threshold that is adequate for the Town.
- **Volumes on Collector Roadways** – The thresholds used in other jurisdictions to determine whether or not collector status roadways are considered for traffic calming tends to range from 1,500 vpd to 3,000 vpd. HTC is suggesting that for collectors within the Town of Portugal Cove-St. Philip's, the threshold be set at 3,000 vpd. These thresholds can always be adjusted once the Town of Portugal Cove-St. Philip's determines the thresholds that are adequate for the Town.

- **Speed on Local Roadways** – On local roadways, traffic calming could typically be considered if the 85<sup>th</sup> percentile speed exceeds the posted speed limit, which, for most local roadways in most jurisdictions throughout Canada, is 50 km/hr. Therefore, 5 km/hr over the posted speed limit on the roadway should be used as the threshold for the 85<sup>th</sup> percentile for local roads.
- **Speed on Collector Roadways** – On collector roadways, travelled speeds are generally expected to be slightly higher than they would be on local roadways. It follows then that the trigger for the consideration for traffic calming should be a slightly higher threshold. It is suggested that this criterion be set at 10 km/hr over the posted speed limit as the threshold for the 85<sup>th</sup> percentile speed on collector roadways.

Table 1 – Initial Screening Criteria for Traffic Calming Requests

Criteria	Thresholds			Notes
	Local Roadways	Collector Roadways	Arterial Roadways	
Grade	< 8%			Traffic Calming is not permitted on roadways with grades exceeding 8%.
Collision History	3	6	n/a	Collision History involving Vulnerable Road Users should be greater than or equal to the values shown over a 3 year period.
Volume	600 vpd	3,000 vpd	n/a	Average Daily Volume should exceed minimum threshold volumes noted.
Speed	5 km/hr over posted speed	10 km/hr over posted speed	n/a	85th percentile speeds should exceed values for each classification of roadway.

Requests for traffic calming on roadways that are classified as Arterial Roadways within the Town's road classification system will not be considered under the Town's traffic calming policy. Traffic calming measures are not appropriate for use on this classification of roadway.

It should be recognized that there are roadways throughout the Town of Portugal Cove-St. Philip's that are classified as Collector Roadways. If traffic calming requests are received for these roadways, any potential treatments resulting from the evaluations must include an appropriate traffic calming design solution which considers the function of these roads within the Town's network.

Traffic calming requests for local roadways and for collector roadways must meet both the volume and speed criteria in Table 1. Requests that meet or exceed the collision threshold criteria shall be considered as having met the minimum initial screening criteria and override the volume and speed criteria. Figure 1 illustrates a flow chart that can be used for screening the initial traffic calming requests.

2.2.1 Collection of Data

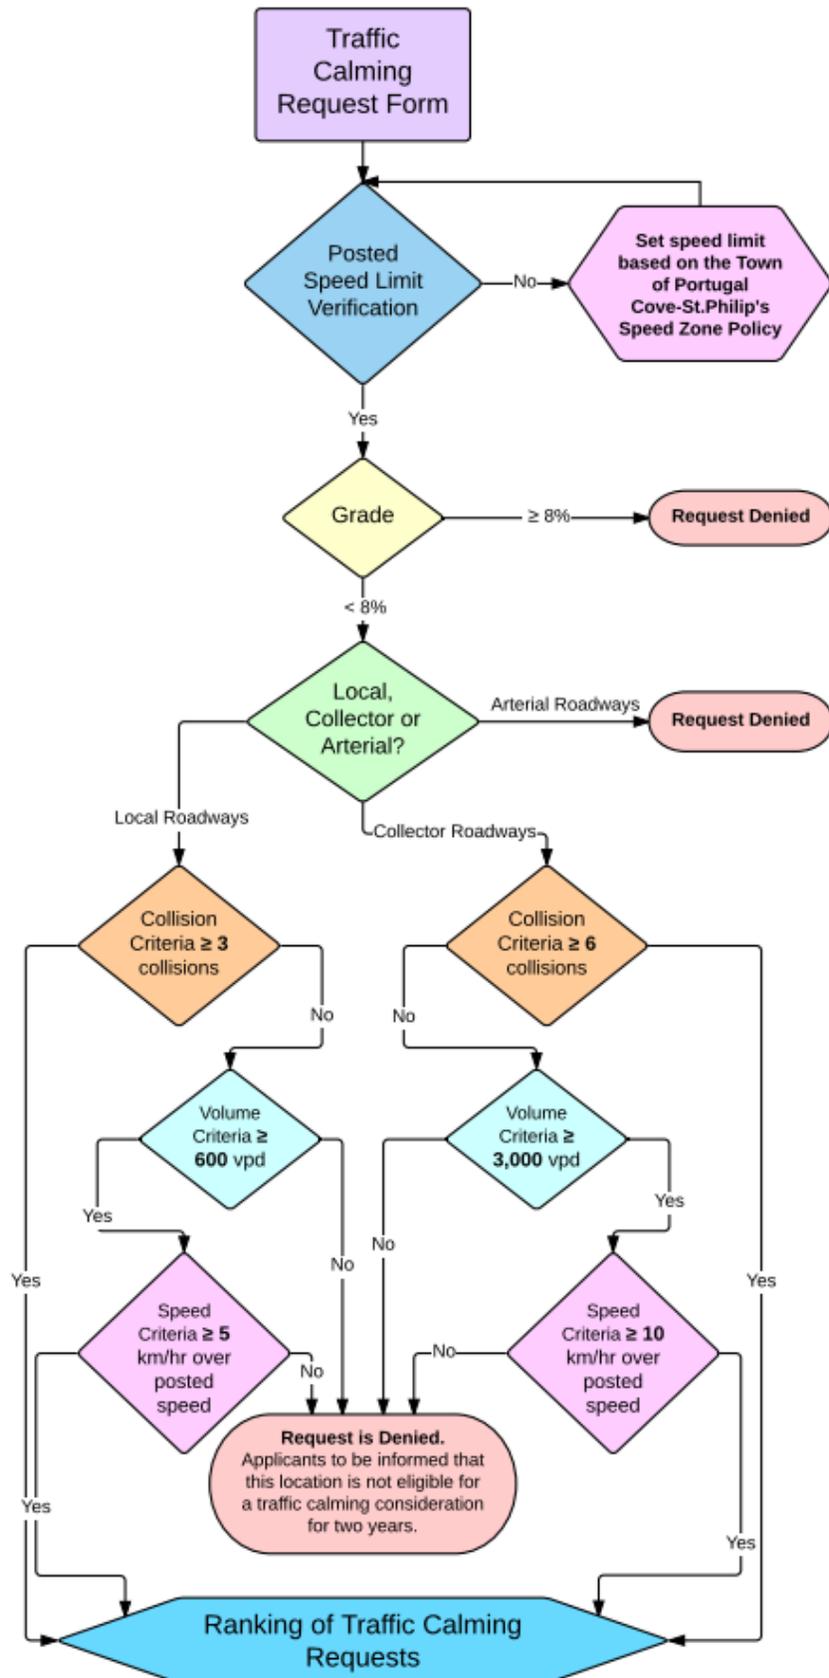


Figure 1 – Initial Screening Flow Chart for Traffic Calming Requests

### 2.3 Step 3 – Ranking Requests

The Town of Portugal Cove-St. Philip's, like all municipalities throughout the Northeast Avalon, has limits on the financial resources that it has available to provide services to residents that live in the community. Traffic calming will be one of many programs that Council will have to carefully consider in allocating Capital funding. If Council decides to fund traffic calming initiatives, the Capital amounts are likely to be limited and it is therefore important to rank all requests that pass the initial screening process to ensure the more serious cases receive funding priority.

HTC is suggesting that Local and Collector status roadways be ranked differently to reflect the intended functionality of the roadway. The following criteria should be considered in ranking the requests:

- Collision History
- Traffic Volumes (ADT)
- 85<sup>th</sup> Percentile Speed
- Presence of Pedestrian Generators
- Pedestrian Facilities
- Non-Local Traffic
- Primary Emergency Route

The weighting of points assigned to the above-noted criteria varies somewhat between local roadways and collector roadways. HTC has attempted to assign points to the criteria that are considered to be more critical to each classification of roadway, such that more severe concerns receive higher rankings. For example, the presence of pedestrian facilities, while important for both local and collector roadways, would be more concerning for collector status roadways where traffic volumes and speeds are likely to be higher and the risk to pedestrian safety would be greater.

The points allocated to the various criteria for local roadways are noted in Table 2 below. The points allocated to the criteria for collector status roadways are noted in Table 3.

Table 2 – Ranking Criteria and Points Allocations for Local Roadways

Criteria	Method of Allocation of Points	Maximum Points
Collision History	<b>2 points</b> for every collision in the previous three years in the study area involving a vulnerable road user	10
Traffic Volumes (ADT)	<b>1 point</b> for every 50 vehicles above the 600 min to a max of 20 points	20
85th Percentile Speed	<b>2 points</b> for every km/hr the 85th percentile speed exceeds the posted speed limit plus 5km/hr to a max of 30 points	30
Presence of Pedestrian Generators	<b>5 points</b> allocated to the presence of a pedestrian generator to a maximum of 15 points	15
Pedestrian Facilities	<b>15 points</b> allocated to streets with no pedestrian facilities present	15
Non-Local Traffic	<b>5 points</b> allocated for every 10% above 30% non-local traffic present to a maximum of 15 points (max points reached at 50% non-local traffic)	10
Primary Emergency Route	<b>-5 points</b> if the roadway under consideration is a primary emergency response route	0
		100

Table 3 – Ranking Criteria and Points Allocation for Collector Roadways

Criteria	Method of Allocation of Points	Maximum Points
Collision History	<b>2 points</b> for every collision in the previous three years in the study area involving a vulnerable road user	10
Traffic Volumes (ADT)	<b>1 point</b> for every 100 vehicles above the 3,000 vpd limit to a max of 20 points	20
85th Percentile Speed	<b>2 points</b> for every km/hr the 85th percentile speed exceeds the posted speed limit plus 10km/hr threshold to a max of 20 points	20
Presence of Pedestrian Generators	<b>5 points</b> allocated to the presence of a pedestrian generator to a maximum of 15 points	15
Pedestrian Facilities	<b>25 points</b> allocated to streets with no pedestrian facilities present on either side of the roadway; <b>15 points</b> if a pedestrian facility is present on one side of the street	25
Non-Local Traffic	<b>2 points</b> allocated for every 10% above 30% non-local traffic present to a maximum of 10 points (max at 80% non Local Traffic)	10
Primary Emergency Route	<b>-10 points</b> if the roadway under consideration is a primary emergency response route	0
		100

### 2.4.1 Collection of Data

The data required for an accurate assessment of the intersection, roadway or area involved in the traffic calming request requires the following information:

- Collision data
- Average daily traffic
- 85<sup>th</sup> percentile speed
- Non-local traffic

Collision data for all roadway links and intersections falling within the municipal boundary of the Town of Portugal Cove-St. Philip's should be available by request from the Portugal Cove-St. Philip's Fire Department.

Average Daily Traffic (ADT) volumes are normally collected over a 24 hour period using standard traffic counters. There are many different types on the market. Non-intrusive counters are a good choice. They are normally deployed on the side of the roadway and are safer for staff to deploy.

The 85<sup>th</sup> percentile speed can be picked up alone or in combination with the traffic volume information. There are portable, non-intrusive devices available that can record the 85<sup>th</sup> percentile speed alone or in combination with volume data collection.

An estimate of non-local traffic can be determined using a number of different methods. For the purposes of this traffic calming policy, the following two methods are provided. They include:

1. Applying the following formulas:
  - Local Roadways – Non-local Traffic Percentage =  $(1 - (600/ADT)) * 100$
  - Collector Roadways – Non-local Traffic Percentage =  $(1 - (3000/ADT)) * 100$
2. Applying the following formula:
  - Non-local Traffic Percentage =  $((ADT - (10 \times \text{number of households on the roadway}))/ADT) * 100$

The first method implies that all traffic above the threshold volumes noted in the initiation screening criteria would be considered non-local. The second method assumes all local residential households generate on the average of 10 two-way trips per day and any traffic above and beyond that figure could be considered non-local traffic.

Both methods are intended to provide approximate percentages of on non-local traffic.

## 2.5 Step 4 – Prioritized Candidate List produced for Council approval and Funding Allocation

As traffic calming requests are received and evaluated by staff, the results should be recorded in an overall database. Records of the screening process and point allocation for the ranking, should be recorded and date stamped for each individual roadway request. As requests are received and evaluated by staff, they should be included in the overall master priority list for traffic calming.

This list will provide Council and staff with an up-to-date priority listing of projects that require attention. Projects can be removed from the listing as they are addressed by staff with the Capital funding made available by Council.

This list could also be made available through the Town's website for the information of residents. By making the listing publically available, residents are more likely to understand that the Town has many areas with concerns with the more serious requests receiving the attention and funding from Council.

## 2.6 Step 5 – Initial Residential Support

In order for any traffic calming project to be successful, the community must support the process and be committed to the solutions that are put in place to resolve the problems that are being experienced. History has shown that where this support is not in place, the traffic calming measures that are put in place, often have to be removed because of opposition from area residents.

The Town of Portugal Cove-St. Philip's needs to ensure that the initial resident support for traffic calming is sufficient enough to avoid any possibility of having to revisit a roadway to remove measures that have been put in place. HTC is suggesting that the initial level of resident support should be a minimum of 60%.

When a roadway receives a capital funding commitment from Council under *Step 4*, Town staff should advise affected residents of the request for traffic calming. This can be done via a survey and requesting feedback and their position as to whether or not they would support traffic calming measures on their roadway. This would also be an opportunity to solicit the names of residents who would like to participate in a focus group session that assist in formulating the traffic calming solution for the roadway.

For traffic calming requests that do not receive the required threshold level of support of 60%, the process ends and any subsequent requests roadway should not be considered again under the policy for a minimum of two years.

## 2.7 Step 6 – Plan Development

The development of the traffic calming plan will be a combined effort consisting of input from the Town staff and/or their consultant with feedback and suggestions from the residents themselves.

At this stage in the traffic calming process, the Town should facilitate a focus group discussion on the plan development. The Town should select from the residents having put their names forward in the initial resident support survey, *Step 5*, a focus group to assist in the traffic calming plan development.

HTC recommends that Town staff prepare initial concepts of various options to kick start and facilitate the group discussion. It would also be appropriate for the Town to present to the focus group, touching on traffic calming and the toolbox of traffic calming measures that are available to deal with specific problems.

At the conclusion of the focus group meeting, staff will have enough information to prepare conceptual drawings of the traffic calming plan proposed for the roadway. Costs estimates can also be prepared at this stage. Depending on the estimated costs, the plan may have to be altered or scaled back to meet funding targets.

### 2.7.1 Traffic Calming Measures

The following provides a description of the different traffic calming measures that are commonly applied, either alone or in conjunction with each other, to formulate a traffic calming plan. These vary in applications from controlling speed, reducing volumes and providing protection for pedestrians and cyclists. The measures are separated into four categories: Vertical Deflections, Horizontal Deflections, Obstructions and Signage.

#### Vertical Deflections:

##### *Raised Crosswalk*

*Description:* Raised crosswalks are very similar to speed humps, speed cushions and speed tables, however raised crosswalks create a more visible crossing for pedestrians. The raised crossing is brought to the same height as the adjacent sidewalk, so the curb is flush at each end. This, however, blocks the path of surface water run-off uphill of the raised crosswalk therefore, additional drainage will need to be considered for roadways with curb.

*Approximate Cost:* \$5,000 to \$20,000

*Control:* Reduce speed and volumes and increase pedestrian visibility



*Transverse Rumble Strips*

**Description:** Rumble strips consist of a pattern of raised markings or grooves applied to the pavement surface to alert motorists of a change in roadway conditions ahead. The rumble strips transmit a sound and a vibration throughout the vehicle, which encourages the motorists to reduce their speed. However, due to the sound from vehicles going over the rumble strips, this will introduce additional noise into the adjacent neighbourhood.



**Approximate Cost:** \$500 to \$2,000 per lane

**Control:** Reduce speed

*Speed Humps, Speed Cushions & Speed Tables*

**Speed Humps**

**Description:** A speed hump is a continuous raised pavement section which requires motorists to drive over the speed hump at a reduced speed. These typically are not used on a roadway that has a high volume of buses or is a primary route for emergency vehicles.



**Approximate Cost:** \$2,000 per speed hump

**Control:** Reduce speed and volumes

**Speed Cushions**

**Description:** Speed cushions are multiple raised pavement sections in a line which requires motorists to drive over at a reduced speed. However, these pavement sections have a space in between to allow for the axles of buses and emergency vehicles to pass over without reducing speed or passing over the speed cushion.



**Approximate Cost:** \$300/linear meter

**Control:** Reduce speed and volumes



**Speed Tables**

**Description:** A speed table is a continuous raised pavement section which requires motorists to drive at a reduced speed. Speed tables are very similar to raised crosswalks, however they have a space allotted on each side to allow for surface water run-off. These can also be used as a crosswalk for pedestrians, however there is a change in elevation from curb to speed table.

**Approximate Cost:** \$750/linear meter

**Control:** Reduce speed and volumes



*Textured Crosswalk*

*Description:* Textured crosswalks are put into place to accentuate the location of a pedestrian crosswalk to motorists and reduce the speed along the roadway. Since textured crosswalks rely on both the physical and visual means to identify their location, added colour to the crosswalk can increase the effectiveness of this traffic calming measure.

*Approximate Cost:* \$100/m<sup>2</sup>

*Control:* Reduce speed and increase pedestrian visibility

Horizontal Deflections:

*Chicanes*

*Description:* Chicanes are a series of curb extensions on alternating sides of the roadway which narrow the roadway and requires vehicles to reduce speed and negotiate from one side of the roadway to the other to travel through the chicane. Typically, three or more curb extensions are constructed together in series.

*Approximate Cost:* \$5,000 to \$15,000 per chicane

*Control:* Reduce speed and volumes



*Curb Extensions*

*Description:* Curb extensions are a horizontal intrusion of the curb into the roadway, which results in a narrower cross section. Curb extensions are used for shortening the crossing distance for pedestrians and improves the motorists' visibility of the pedestrians. Curb extensions also reduce speeds by narrowing the roadway.

*Approximate Cost:* \$10,000 to \$20,000

*Control:* Reduce speed and increase pedestrian visibility

### *On-Street Parking*

**Description:** By introducing on-street parallel parking on one or both sides of the road, the number of driving lanes on the roadway and, in turn, the amount of vehicles and speed on the roadway can be reduced.

**Approximate Cost:** \$200 to \$500

**Control:** Reduced speed and volumes



### *Traffic Calming Circles*

**Description:** A traffic calming circle is a raised island in the centre of the intersection, which requires motorists to travel counter-clockwise around the center island. Traffic calming circles allow traffic to flow freely through an indirect path at an intersection and this cause motorists to slow down and yield before entering the intersection. Motorists enter the intersection by first turning right and then must turn left around the center island and then finally right to exit the intersection.

A traffic calming circle is not a roundabout. A roundabout is larger and has raised median islands on all approaches, in some cases with two or more lanes.

**Approximate Cost:** \$4,000 to \$15,000

**Control:** Reduce speed




**Obstruction:**

*Directional or Full Roadway Closures*

**Description:** A physical device located in the roadway which obstructs and prohibits one direction of travel (directional closure) or prohibits access entirely (full closure). Closures eliminated short-cutting or through traffic on the roadway. Bicyclists and pedestrians are still permitted to enter at these enclosures.

**Approximate Cost:** \$3,000 to \$35,000

**Control:** Reduce speed and volumes

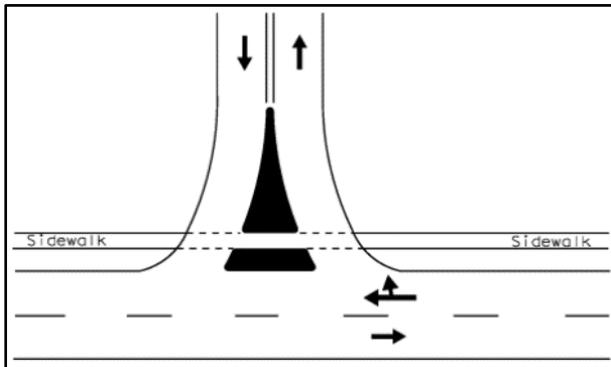

*Right-in/Right-out Island*

**Description:** Right-in/right-out islands are raised triangular island on an intersection approach that prevents left-turning movements from the major roadway and the minor roadway. This reduces the pass-through traffic and traffic volumes on the roadway.

**Approximate Cost:** \$7,000 to \$15,000

**Control:** Reduce volumes

**Signage:**

*Maximum Speed Sign*

**Description:** The maximum speed sign indicates to motorists that the maximum legal vehicle speed permitted on the roadway. Other signage such as, School Area sign or Playground sign can accompany the Maximum Speed signage, which is typically placed on the right-side of the roadway.

**Approximate Cost:** \$200 per sign

**Control:** Reduce speed



#### Radar Speed/Feedback Sign

*Description:* Radar speed signs, commonly known as feedback signs, are used to inform motorists of their speed and encourage them to reduce their speed to the posted speed limit.

*Approximate Cost:* \$2,000 to \$3,000

*Control:* Reduce speed



#### Through Traffic Prohibited Sign

*Description:* The **Through Traffic Prohibited** sign is to prohibit traffic that is short-cutting through the residential neighbourhoods. These signs are sometimes accompanied by an additional tab sign indicating days and hours that the prohibition is in effect.

*Approximate Cost:* \$200 per sign

*Control:* Reduce volumes

#### Speed Bumps Ahead Sign

*Description:* The Speed Bumps Ahead sign is to alert the motorists that they are approaching speed bumps, humps, cushions or tables on the roadway. This informs the motorist to reduce their speed and potentially will defer them from using this route as a short-cutting roadway. As shown above, this sign would be placed on the right side of the road in advance of the speed hump, cushion or table.

*Approximate Cost:* \$200 per sign

*Control:* Reduce Speed and volumes



#### Traffic-Calmed Neighbourhood Sign

*Description:* The traffic-calmed neighbourhood sign is to advise motorists that traffic calming measures are in place throughout this neighbourhood. This increases motorists' awareness and reduces short-cutting and speeding.

*Approximate Cost:* \$200 per sign

*Control:* Reduce speed and volumes

## 2.8 Step 7 – Resident Support

Once the traffic calming plan development, *Step 6*, has been completed, the Town of Portugal Cove-St. Philip's will finalize the concept plans with descriptions of the traffic calming measures and the cost estimates associated with each concept.

The finalized concept plan and descriptions will then be communicated to the surrounding neighbourhood residents that would primarily be affected by the new traffic calming measure. The concept package can be sent via e-mail or mail and placed on the Town of Portugal Cove-St. Philip's website, asking for feedback about the proposed traffic calming measure. The Town would request for the feedback, and other comments, to be returned within two to three weeks for a final assessment.

The neighbourhood support should be greater than 60%, similar to *Step 5*. If the 60% is not met, the traffic calming measure proposed for this location will not be considered again under the policy for a minimum of two years.

## 2.9 Step 8 – Final Council Approval

Once the 60% approval threshold has been met for the proposed traffic calming measures that were sent to the affected neighbourhood residents, the Town staff will revise the cost estimates and prepare a report to recommend to Council.

Once Council approves the recommended traffic calming measure, the design, tendering and construction phases would commence.

## 2.10 Step 9 – Design, Tendering & Construction

Once Council has approved the proposed traffic calming plan, the Town staff and/or consultant will proceed to develop a preliminary design, detailed design, call for tender and construction of the traffic calming device(s). Below, in Table 4, shows a summary table of the traffic calming measures with the approximate cost, location and spacing of the devices, along with the desired control of the traffic calming device.

Table 4 – Summary Table of Traffic Calming Measures

Measure	Description	Costs	Location & Spacing	Control
<b>Vertical Deflection</b>				
Raised Crosswalks	Raised crosswalks are very similar to speed humps, speed cushions and speed tables, however raised crosswalks create a more visible crossing for pedestrians. The raised crossing is brought to the same height as the adjacent sidewalk, so the curb is flush at each end.	\$5,000 to \$20,000	Marked crosswalks & midblock crossings	Reduce Speed/Volume & Increase Pedestrians Visibility
Rumble Strips	Rumble strips consist of a pattern of raised markings or grooves applied to the pavement surface to alert motorists of a change in roadway conditions ahead. The rumble strips transmit a sound and a vibration throughout the vehicle, which encourages the motorists to reduce their speed.	\$500 to \$2,000	50 km/hr - locate 65m in advance 60 km/hr - locate 85m in advance	Reduce Speed
Speed Humps	A speed hump is a continuous raised pavement section which requires motorists to drive over the speed hump at a reduced speed. These typically are not used on a roadway that has a high volume of buses or is a primary route for emergency vehicles.	\$2,000/hump	30 km/hr - every 60m 40 km/hr - every 80m 45 km/hr - every 100m 50 km/hr - every 125m	Reduce Speed/Volume
Speed Cushions	Speed cushions are multiple raised pavement sections in a line which requires motorists to drive over the speed cushion at a reduced speed. However, these pavement sections have a space in between to allow for the axles of buses and emergency vehicles to pass over without reducing speed or passing over the speed cushion.	\$300/linear meter	30 km/hr - every 60m 40 km/hr - every 80m 50 km/hr - every 125m	Reduce Speed/Volume
Speed Tables	A speed table is a continuous raised pavement section which requires motorists to drive over the speed hump at a reduced speed. Speed tables are very similar to raised crosswalks, however they have a space allotted on each side to allow for surface water run-off. These can also be used as a crosswalk for pedestrians, however there is a change in elevation from curb to speed table.	\$750/linear meter	30 km/hr - every 60m 40 km/hr - every 80m 50 km/hr - every 125m	Reduce Speed/Volume
Textured Crosswalk	Textured crosswalks are put into place to further identify the location of a pedestrian crosswalk to motorists and reduce the speed along the roadway. Since textured crosswalks rely on both the physical and visual means to identify their location, added color to the crosswalk can increase the effectiveness of the traffic calming measure.	\$100/ m2	At any crosswalk	Reduce Speed & Increase Pedestrians Visibility
<b>Horizontal</b>				
Chicane	Chicanes are a series of curb extensions on alternating sides of the roadway which narrow the roadway and requires vehicles to reduce speed and negotiate from one side of the roadway to the other to travel through the chicane.	\$5,000 to \$15,000 per chicane	Mid-block locations, > 20m away from an intersection	Reduce Speed/Volume
Curb Extension	Curb extensions are a horizontal intrusion of the curb into the roadway, which results in a narrower section of roadway. Curb extensions are used for shortening the crossing distance for pedestrians and improves the motorists' visibility of the pedestrians.	\$10,000 to \$20,000	At intersections and mid-block crossings	Reduce Speed & Increase Pedestrians Visibility
On- Street Parking	By introducing on-street parking on one or both sides of the road, reduces the number of driving lanes on the roadway and in turn reduces the amount of vehicles on the roadway.	\$200 to \$500	Not effective on rural cross sections	Reduce Speed/Volume
Traffic Calming Circle	A traffic calming circle is a raised island in the centre of the intersection, which requires motorists to travel counter-clockwise around the center island. Traffic calming circles allow traffic to flow freely through an indirect path at an intersection and this cause motorists to slow down and yield before entering the intersection.	\$4,000 to \$15,000	Consecutive intersections	Reduce Speed
<b>Obstruction</b>				
Directional or Full Closure	A physical device located in the roadway which obstructs and prohibits one direction of travel (directional closure) or prohibits access entirely (full closure). Closures eliminated short-cutting or through traffic on the roadway.	\$3,000 to \$5,000	Local streets	Reduce Speed/Volume
Right in Right Out Island	Right-In/Right-Out Islands are raised triangular island on an intersection approach that prevents left-turning movements from the major roadway and the minor roadway. This reduces the pass-through traffic and traffic volumes on the roadway.	\$7,000 to \$15,000	Local and residential collector streets	Volume
<b>Signage</b>				
Maximum Speed Sign	The maximum speed sign indicates to motorists that the maximum legal vehicle speed permitted on the roadway.	\$200 per sign	Any street	Reduce Speed
Radar Speed/ Feedback Sign	Radar speed signs, also known as Feedback signs, are used to inform motorists of their speed and encourage for them to reduce their speed to the posted speed limit.	\$2,000 to \$3,000	Any street	Reduce Speed
Through Traffic Prohibited Sign	The Through Traffic Prohibited sign is to prohibit traffic that is short-cutting through the residential neighbourhoods.	\$200 per sign	Any street	Reduce Speed
Speed Bumps Ahead Sign	The Speed Bumps Ahead sign is to alert the motorists that they are approaching speed bumps, humps, cushions or tables on the roadway. This informs the motorist to reduce their speed and potentially will defer them from using this route as a short-cutting roadway.	\$200 per sign	Any street	Reduce Speed
Traffic-Calmed Neighbourhood Sign	The traffic-calmed neighbourhood sign is to advise motorists that traffic calming measures are in place throughout this neighbourhood. This increases motorists' awareness and reduces short-cutting and speeding.	\$200 per sign	Any street	Reduce Speed

## 2.11 Step 10 – Follow-Up

After the traffic calming plan has been completed, Town Staff should document any comments or concerns about the new traffic calming measure from the local residents.

At 6 months, the Town should review the initial traffic calming request and verify that the new traffic calming plan is addressing the issues that were brought forward. If the issues are not being resolved, another traffic calming measure may be required to work in conjunction with the new traffic calming plan.

Town Staff should document any changes to previous traffic calming concepts in the Master Database to improve future traffic calming improvements to local and collector roadways throughout the Town of Portugal Cove-St. Philip's.

## 3 Other Related Items

### 3.1 Measuring Speeds and Traffic Volumes for Data Collection

There are multiple ways to record traffic speeds and volumes on a roadway. Below are some of the devices that can be placed out near the roadway or intersection to record traffic:

- Jamar – Radar Recorder
  - This system can record speed, volumes, gaps and classification of vehicles on a roadway. This device includes a data box that records traffic with a time stamp, which results in better data collection. This device needs to be installed on a pole near a straight road and not near any intersection or access point.



- Miovision – Scout Video Collection Unit
  - The Scout Video Collection Unit is a portable video data collection device that is built for reliable and unattended field operation for days at a time. The unit records video of an intersection or roadway, which is then uploaded to Miovision's website for processing. The user can then choose the desired output results, such as turning movement counts, ADT's, or pedestrian counts.



### 3.2 Emergency Vehicle Routes

Due to the fact that most collector roadways in the Town of Portugal Cove-St. Philip's are emergency vehicle routes, traffic calming measures that can be imposed on those roadways are limited. Below is a list of traffic calming measures and their impact on emergency vehicle routes:

**No impact:**

- Rumble Strips
- Speed Cushions
- Textured Crosswalks
- Chicane (Two-way)
- Directional Closure
- All Signage

**Minor impact:**

- Raised Crosswalk
- Speed Humps
- Speed Tables
- Chicane (One-way)
- Curb Extension
- On-Street Parking
- Traffic Circle
- Right-In/Right-Out

**Major impact:**

- Full Closure

### 3.3 Design of New Subdivisions with Traffic Calming Measures

Throughout the Town of Portugal Cove-St. Philips, there are subdivisions and extensions of existing developments being constructed. Traffic calming measures can be incorporated into the design of the new subdivisions, which encourages a traffic-calmed neighbourhood. Due to some of the traffic calming measures having a specific right-of-way required, such as traffic circles, this can easily be incorporated into the new developments at the early design stages.

For other traffic calming measures, such as raised crosswalks and chicanes, storm water management is important due to the traffic calming measure extending across the entire cross width of the roadway. This prevents surface water run-off from getting to the catch basin and can result in flooding uphill of the traffic calming measure. If the raised crosswalks and chicanes were incorporated into the design of the subdivisions, this problem could be averted and included in the storm water management design.

Overall, introducing traffic calming measures into the design stage of new developments, will improve the aesthetics of the subdivision, reduce the speeds and through traffic volumes and provide a safer and friendlier environment for children and other users.

### 3.4 Sources of Information & References

Information used in this Traffic Calming Policy was referenced from the following documents:

- TAC – Canadian Guide to Neighbourhood Traffic Calming
- City of St. John's – Development of Traffic Calming Policy & Warrant
- TrafficCalming.org



# APPENDIX A

---

## Traffic Calming Request Form

## Traffic Calming Request Form

Please complete the following form and return to the  
*Town of Portugal Cove-St. Philips*



*Traffic Calming is a combination of physical measures, that when implemented, reduce the negative effects of the use of motor vehicles on residential streets, alter motorists' behaviour and improve conditions for both pedestrians and cyclists.*

Applicant Name: \_\_\_\_\_  
Applicant Address: \_\_\_\_\_  
Date: \_\_\_\_\_

Please select one of the following areas that relate to the nature of your concern:

- Residential Area                       School/ Day Care Zone  
 Recreational Area

Please select any of the following traffic concerns:

- High Speeds in Neighbourhood       Collision Concerns  
 Aggressive Driving Behaviour       Pedestrian Safety

Specific location of concern (intersection, road name, civic number):

Further details about traffic concerns:

Suggested Traffic Calming Solution:

Signing below indicates your understanding that the Town of Portugal Cove-St. Philips and Council will review and assess the concerns noted above to the best of their ability, if the criteria and required public support are met, as per the *Town of Portugal Cove-St. Philips Traffic Calming Policy*.

Applicant Signature: \_\_\_\_\_  
Contact Number: \_\_\_\_\_  
E-mail Address: \_\_\_\_\_

Would you like to participate in the Focus Group discussion?       Yes       No